

Customer Name and Address: _____

Door/Unit Type: D DS SD SDS DD SDDS Transom

(D = Door; S = sidelite)

Rough Opening Width: _____ - 3.0" = Door Width _____

Rough Opening Height: _____ - 2.5" = Door Height _____

Door Jamb Width (width of wall/stud + drywall thickness) = _____

(Most common jamb size is 6-9/16" for exterior doors)

Jamb Composition: FJP Primed Stain grade

Door Thickness: 1-3/4" Other: _____

Brick Moulding: Yes No Code: NAFS Old Code

Door Composition: Metal Fiberglass Wood Other: _____

Door Skin: Paint grade Stain grade Smooth Textured

Door Swing: LH RH Open-Out

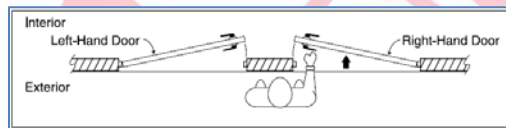


Figure 1 - When pushing the door away from you, the side the hinges are on is the correct hand of the door.

Hinge Colour: Stainless Steel Polished Chrome Venetian Bronze Flat Black Satin Nickel Brass

Hinge Type: Regular Concealed Self-Closing Ball-Bearing

Sill Style/Colour: Aluminum Sill FJP Aluminum Sill Stain Grade Black Sill (FJP or Stain Grade)

Drill Style: Single-Drilled Single Drilled w/ Multipoint Double-Drilled Double-Drilled w/ Rollers

Multipoint

Locking Mechanism: Standard Multipoint

Door Style: _____

Glass Style (if applicable): _____

Energy Program: Old code NAFS